
Automatic Breading Machine

BM 110



BM 110 Automatic breading machine

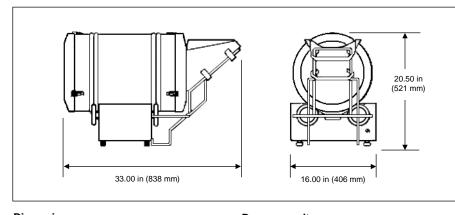

Dimensions

Electrical

Height	20.50 in	(521 mm)			
Width	33.00 in	(838 mm)			
Depth	16.00 in	(406 mm)			
Crated					
Grateu					
Length	33 in	(840 mm)			
Depth	17 in	(430 mm)			
Height	22 in	(560 mm)			
Volume	7.2 ft ³	(0.20 m ³)			
Weight	66 lb	(30 kg)			

Drum capacity	
Product	25 lb (4.5 kg) per load
Throughput	400 lb (181 kg) per hour

Laboratory certifications



Volts	Phase	Hertz	kW	Amps	Wire*	Cord & Plug
120	1	50–60	0.18	0.4	2+G	Included with 120 V
240	1	50–60	0.18	0.2	2+G	
						NEMA 5-15P

Henny Penny automatic breading machines are designed to provide high volume fried chicken operations with a constant supply of freshly breaded product.

The BM 110 automatic breading machine uses a rotating drum to gently tumble food through breading at a rate of up to 400 lb (181 kg) per hour. This compact tabletop unit will give your freshly breaded products a consistent look, taste and texture, while saving labor and reducing breading and product waste.

Standard Features

- Large 10 lb (4.5 kg) capacity stainless steel drum and paddles produce continuous feed and tumbling action
- Gentle tumbling action promotes even coverage while saving up to 25 percent on breading usage
- Compact design requires only three linear feet of counter space, plus catch pan
- Heavy duty motor with chain drive operates at a minimum of 8 rpm to eliminate slippage and reduce wear
- Single switch control
- · Adjustable leveling legs
- Quick disassembly for dishwashersafe cleaning

Bidding specifications

Provide Henny Penny model BM 110 Automatic Breading Machine designed to "tumble" bread up to 400 lb (181 kg) of product per hour.

Unit shall incorporate:

- Heavy duty motor with 8 rpm minimum drum rotation to protect motor from excess wear
- High-quality stainless steel drum and paddle assembly
- Disassembly for easy cleaning
- 6 ft (1.8 m) power cord and plug with 120 V unit

*Units shipped without power cord and plug must have power cord and plug installed on site by a qualified electrician.

Continuing product improvement may subject specifications to change without notice.

24 Hour Technical Support: Henny Penny Technical Service 800 417.8405 technicalservices@hennypenny.com
 Henny Penny Corporation

 PO Box 60
 Eaton OH 45320 USA

 +1 937 456.8400
 800 417.8417

 +1 937 456.8434 Fax
 800 417.8434 Fax

 www.hennypenny.com
 S00 417.8434 Fax

